


TAILOK

With transmitter and digital display

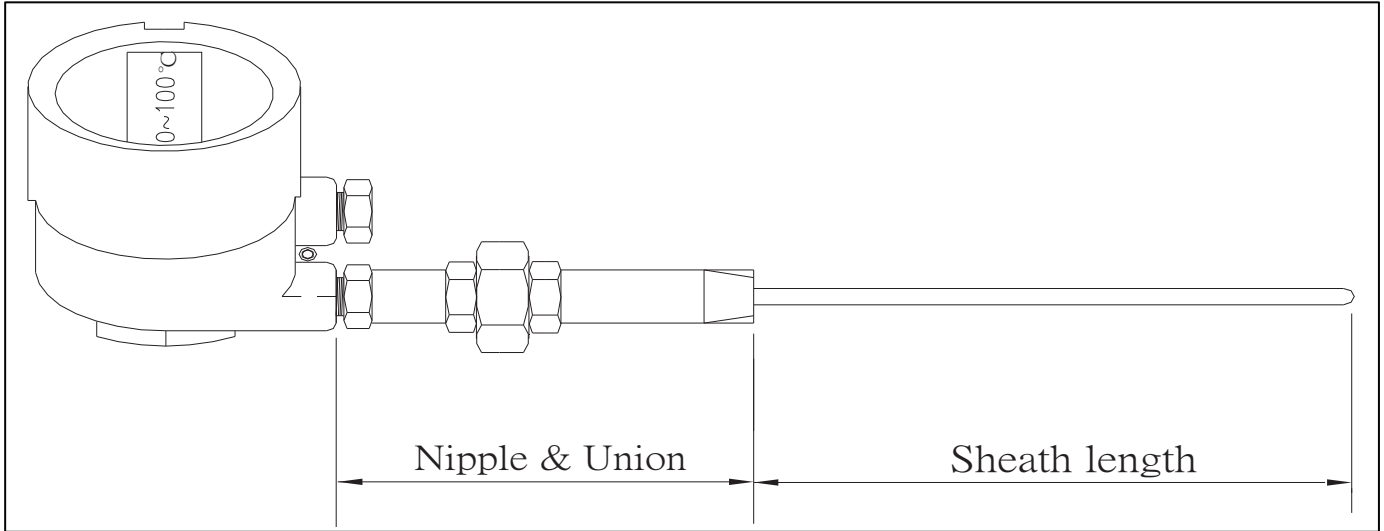

Wide spread on the temperature sensor markets are measuring insets with a spring loading in extension. The below listed version provide this feature. Even, the exchange of the measuring inset require more effort, may also be applied as intergral sensor assemblies in conjunction with field mounted temperature transmitters. This option enables the observation of the display in a 90 angle in relation to the thermowell.

Devices with central spring are available, as Non-Ex-, intrinsically safe (Eex i)- and explosionproof (Eex d) version according ATEX.

TT basic type			
HTE	explosion protection head box		
HTE- N	explosion protection head box connecting nipple (with spring load)		
HTE-UN	explosion protection head box connecting nipple & union(with spring load)		
	conduit	AE1	material: Aluninium head 3/4"NPT, process connector1/2"NPT
		AE2	material: Aluninium head 1/2"NPT, process connector1/2"NPT
		SE1	material: 316SS head 3/4"NPT, process connector1/2"NPT
		SE2	material: 316SS head 1/2"NPT, process connector1/2"NPT
	Sheath Dia.	A	3.2 mm
		B	4.8 mm
		C	6.0 mm
		D	6.35mm
		E	8.0 mm
		F	OPTION
	Sensor	1	SINGLE
		2	DUAL
		3	TRIPLE
4		OPTION	
Type	A	PT—100 A class	
	B	K TYPE	
	C	J TYPE	
	D	E TYPE	
	E	T TYPE	
	H	N TYPE	
	I	S TYPE	
	J	R TYPE	
K	B TYPE		
Transmitter	0	No display	No display
	1	with LCD display	with LCD display